

Flexem IOT HMI 7000 series

Model: FE7070WE-4G

Product Overview

FE7000 series, a new generation of IoT human-machine interface. Continues the high cost-effectiveness of the FE6000 series, with industrial ABS plastic casing, low cost, and high reliability; The new rear cover mold setting optimizes the rear cover design based on the FE6000 series, removes the small cover design, increases antenna holes, and improves the overall design feel of the product. There are also multiple resolution models available to meet the needs of different application scenarios.

FE7070WE-4G is a traditional HMI product that uses 1G, A7 processors and high-resolution screen display, making it suitable for various industrial production scenarios. IoT function is built-in.

Products Appearance



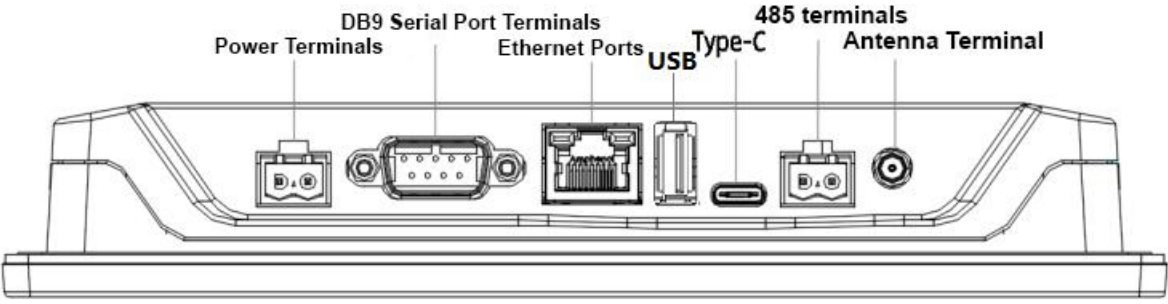


Hardware Specification

Hardware Parameters	Display	7" 16:9 TFT LCD
	Resolution	1024×600 pixels
	Color range	24-bit
	Brightness (cd/m ²)	350
	Backlight	LED
	Half Brightness Life Time (MTBF*1)	50000 hours
	Touch Screen	4-wire Industrial Resistive Type
	CPU	1GHz Cortex-A7
	Memory	128MB DDR + 4GB EMMC
	RTC	Built-in
	Ethernet port	1-line 10M/100M self-adaptive
	SD Card	Not Support
	USB Port	1 USB Type-C port 1 USB Type A port
	Download method	USB Slave Port / USB drive/Ethernet
	Serial port	COM1:RS232/RS485/RS422 COM2:RS485 COM3:RS232
LCD viewing angle (T/B/L/R)	85'/85'/85'/85'	
Software parameters	Networking Mode	Ethernet/4G
	Network Band	LTE FDD: B1/B3/B5/B8 LTE TDD: B38/B39/B40/B41
	VPN Transmission	Support
	Data Monitoring	300 points
	Alarm Pushing	100 points
	Historical Data	30 points
	Edge Computing	20 points
	Protocols	Support more than 100 industrial protocols
	Maintenance and Management	Support import and export configuration files, and cloud download to update configuration is also available.
Electrical specifications	Rated Power	< 10W
	Rated Voltage	DC24V
	Permitted voltage range	+9VDC ~+28VDC
	Power supply protection	With lightning surge protection
	Allowable power-off time	< 5mS








	Certification	CE: Comply with EN61000-6-2:2005, EN61000-6-4:2007 standards RoHS: Comply with RoHS EMC: Lightning surge±1KV, group pulse±2KV Electrostatic contact 4KV, air discharge:8KV
Environmental requirements	Working Temperature	0~50°C
	Storage Temperature	-20~60°C
	UV-Proof	Do not work in strong ultraviolet environment (such as direct sunlight).
	Environment humidity	10~90%RH (Non condensing)
	Anti-vibration	10~25Hz(X,Y,Z direction 2G/30 minutes)
	Cooling method	Natural Cooling
Mechanical Parameters	Protection	Front: IP65 Rear: IP20
	Mechanical Structure	Engineering Plastics
	Panel Cutout	190mm×136mm
	Machine Size	204mm×145mm×34mm
	Net Weight	About 472 g

Wiring Definition

		
Power Terminals (Pin1~2 from left to Right)		
	Pin1	0V
	Pin2	DC24V
DB9 Serial Port Terminals		
	Pin1	Rx-(B) (COM1 RS422/485-)
	Pin2	RxD (COM1 RS232)
	Pin3	TxD (COM1 RS232)
	Pin4	Tx- (COM1 RS422)



	Pin5	GND
	Pin6	Rx+(A) (COM1 RS422/485+)
	Pin7	RxD (COM3 RS232)
	Pin8	TxD (COM3 RS232)
	Pin9	Tx+ (COM1 RS422)
485 terminals (Pin1~2 from left to Right)		
	Pin1	A+ (COM2 RS485+)
	Pin2	B- (COM2 RS485-)
Ethernet Ports		
	RJ45	Used for setting Ethernet with controllers or used for connecting server.
Type-C OTG Port		
	Type-C	Slave:Used for downloading programs and debugging
		Master:Used for connecting U-disc and bar code scanner etc.
USB Type A Port		
	USB Type A	Used for downloading programs and debugging. And connecting U-disc and bar code scanner etc.
Antenna Terminal		
		Antenna terminal for IoT function



